

PWTR6



DESIGN YOUR OWN
PROTOTYPE ONLINE



CANopen
J1939



CANBUS ROTARY ENCODER

PWTR6 embodies an advanced CANbus keypad, featuring a rotary encoder and robust IP67 protection. The 6 quick-select buttons seamlessly complement the functionality of the pushable rotary encoder, which is also available in a joystick version (PWTR6-J). This combination provides precise and intuitive control of onboard displays, putting everything at your fingertips. Customization is tailored to your needs: you can personalize the rubber artwork and LED color of each button and backlighting. Powertrack is available with both CANopen and J1939 protocols.

SOFTWARE FEATURES

CAN Keypad Addresses - You are able to assign any valid CAN address to the keypad.

CANopen Communication Protocol - Fully compliant with Device Profile 401d.

J1939 Address Claim Transmission - Keypads no longer have to be pre-programmed to a specific address. This enables customers that work in applications in the field without access to a GUI to use any replacement keypad on-hand. The keypad can be configured to automatically announce its address and accept a new address assignment as appropriate.

Smart LED Management - Each light spot consists of three different colored LEDs (RGB). In this way it is possible to independently adjust color and intensity gradient of each light spot by simply changing the intensity of individual LEDs.

Event Status Transmission - The keypad can send messages to the BUS indicating a button press event or a button release event has occurred. The event that triggers the message can also be caused by the movement of the joystick or the rotation of the encoder.

Concave Keys - The ergonomic design simplifies touch navigation of the quick-pick keys.

Periodic Status Transmission - The keypad sends a continuous broadcast of messages, indicating the status of each button, as well as the positions of the joystick and the encoder at that instance. The frequency of these messages can be adjusted in a wide range.

Periodic Heartbeat - The keypad sends a continuous broadcast of messages indicating it is functioning correctly. The frequency of these messages can be adjusted in a wide range.

Backward-compatible: PWTR6 uses the same CAN protocols as the legacy Powertrack model. This means that it is possible to replace a Powertrack with a PWTR6 with minor changes to the control unit.

HARDWARE FEATURES

UV Protected - UVB 400 hours: Keypad is highly resistant to deterioration caused by exposure to sunlight.

IP67 Waterproof Rating - Guaranteed to be dust tight and sealed against water immersion to a depth of 1 meter for up to 1 hour.

Independent KEY - The device is able to support any multiple pressure key combination.

Ergonomic Knob - This controller is designed for a comfortable grip in any situation, thanks to the textured sides of the aluminum knob.




STANDARD FEATURES

- High intensity led status indicators
 - Multicolor LED backlight
 - RGB LED indicators
 - Event status transmission
 - Periodic status transmission
 - Flush mount design
 - Vertical or horizontal mount
- Protected from inverted polarity
 - Encoder with pushbutton
 - Periodic Heartbeat
 - LED acknowledgement
 - CANopen and J1939 communication protocol


CUSTOM FEATURES

- Custom laser etched icons
 - Joystick function for the knob
- Custom knob shape
 - Custom logo on the knob

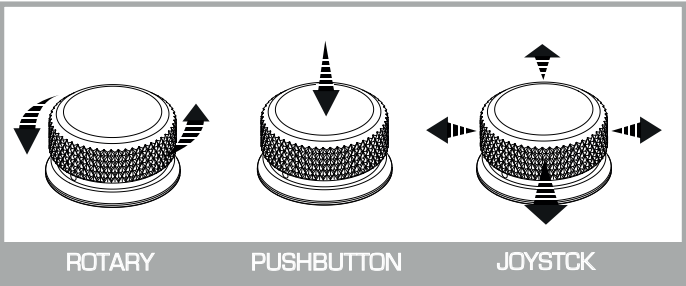


SPECIFICATIONS FOR STANDARD KEYPADS

PWTR6



PWTR6-J



ELECTRICAL

Supply Voltage	12-24Vdc Nominal (8-32VDC)	
Standby Current	<50 mA	
Communication BUS	CANopen, J1939	



MECHANICAL

Connector	Deutsch DT04-4P	
Switch Life	3 million operations min.	
Encoder pushbutton life	1 million operations min.	
Encoder rotation life	1 million operations min.	
Mounting Studs	#10-32 Steel	
Keypad	Silicone rubber with polyurethane hardcoat	
PC Board	1,6mm thick, Nema Grade FR-4, double clad with 1oz copper	
Operating Temperature	-40°C to +70°C	
Storage Temperature	-40°C to +85°C	
UV Protection	UVB 400 hours	
Salt Spray	Per ASTM B117	
Chemical Resistance	Deet, Engine Cleaner, Isopropyl Alcohol, Suntan Lotion, Multi-Purpose Cleaner, Orange Citrus Cleaner	
Ingress protection Rating	IP67	
Weight	230 gr	240 gr



JOYSTICK

Activation force	N/A	5.5±3.5N (560±350gf)
Max. angle	N/A	6°
Operational life	N/A	500,000 cycles min.


OPTION MOUNT

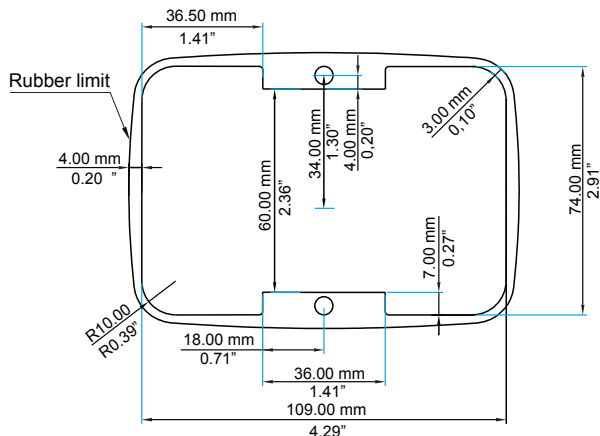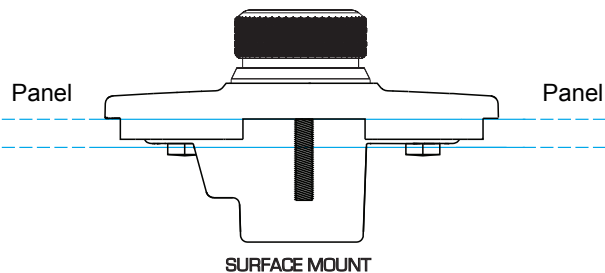

SURFACE MOUNT CUTOUT

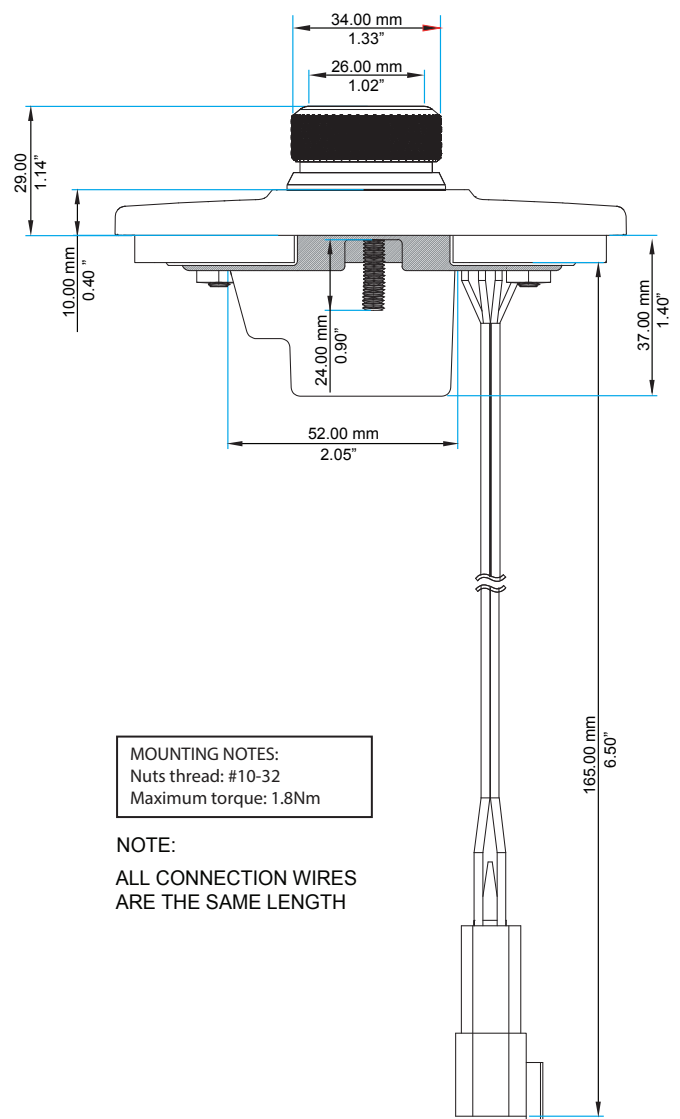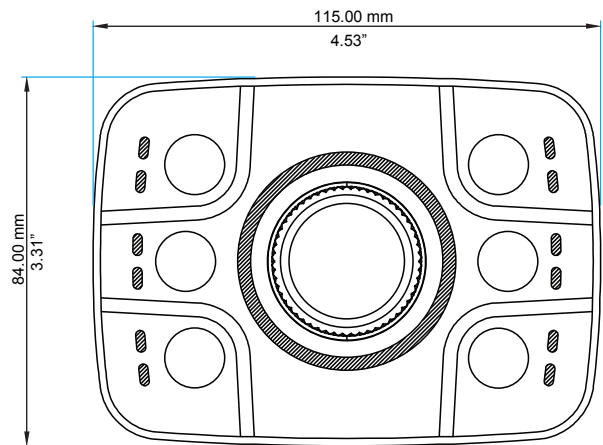

BLACK=GROUND WHITE=CAN H
RED=POWER BLUE=CAN L

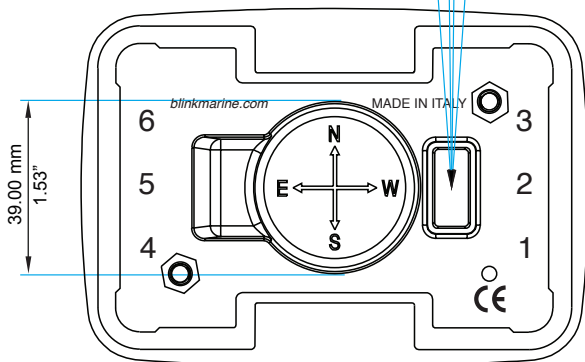

MOUNTING NOTES:
Nuts thread: #10-32
Maximum torque: 1.8Nm

NOTE:
ALL CONNECTION WIRES
ARE THE SAME LENGTH

blink
MARINE

Blink S.r.l.
Via Montefeltro, 6 - 20156 Milano - Italy
Tel. +39 02 3088583 - Fax +39 02 33406697
www.blinkmarine.com - info@blinkgroup.com

[WARNING] IMPROPER SELECTION, IMPROPER USE AND/OR FAILURE OF THE BLINK SYSTEMS PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. This document and other information from Blink, provide product and/or system options for further investigation by users having technical expertise. It is important to analyze all aspects of the application, including consequences of any failure. Due to the variety of operating conditions and applications for these product(s), the manufacturer of the application is solely responsible for marking the final selection of the product(s) and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Blink at any time without notice.